

**MODEL NO. P64R/F**

This is 6 ch. Reverse and forward type chaser. 6 ch. 24 kw. Chase selector for 2 to 6 and R/F. Input by HT4 60Amp. Strip. Speed control by volume. Use in beam par light hallogen, pc, profile, 220 volt LED lari, strip ,tent lighting and other.



**Model NO. P64R/F**

**Model No.P64A**

6 channel 24 kw action chaser. Main input by HT2 60Amp. strip. Output by HT8 60Amp.strip. SIZE: (WHD) .....x.....x..... WEIGHT : .....KG COLOR: Grey.



**Model NO. P64A**

**Model No.P66R/F**

6 channel 36 kw chaser. Main input by HT2 60Amp. strip. Output by HT8 60Amp.strip. SIZE: (WHL) .....x.....x..... WAIGHT : 3.00KG COLOR: Grey.



**Model NO. P66R/F**



**Dmx 512 panel for 192 ch.**

**Model no. P604(ST)**

- ➔ 6 CH 15 kw Dimmer pack
- ➔ Power 3 phase or 220 volt 50Hz
- ➔ Each Phase 32 Amp MCB.
- ➔ Load by 60 Amp. Strip
- ➔ Flash switch and load indicators.
- ➔ Chaser line. Selector switch
- ➔ Master for dimming of 6 output.
- ➔ Each ch 20 amp fuse
- ➔ 8 pin circular socket for remote in
- ➔ Phase indicators of R Y B by L.E.D
- ➔ Size : 485x305x105
- ➔ Weight: 7.4 kg



(TESTING ON 4 KW each ch.)

**Model no. P604(S)**

- ➔ 6 CH 15 kw Dimmer pack
- ➔ Power 3 phase or 220 volt 50Hz
- ➔ Each Phase 32 Amp MCB.
- ➔ Load by 16 Amp. 5 pin socket.
- ➔ Flash switch each ch.
- ➔ Chaser ch. Selector switch
- ➔ Master for dimming
- ➔ Each ch 16 amp.X 2 Socket of 5 pin
- ➔ 8 pin circular socket for remote input
- ➔ Phase indicators by R Y B L.E.D
- ➔ Size : 485x320x165x
- ➔ Weight: 9.3 kg



(TESTING ON 4 KW each ch.)



**NOTE**

- \*. All product size, weight, color not actual .
- \*. All product be try correct feature provide.
- \*. Possible any correction by mistake.
- \*. Be provide prabhat product maximum.
- \*. Be request all dealer and retailer please check proper Before buy a product for actual model.
- \*. No replcement any product only repair and service

Dealer Space



ISO 9001-2008 CERTIFIED

**CATALOGUE**  
**CATALOGUE**  
**2017-18**

**ISO 9001-2008**

Product by;  
PRABHAT ELECTRONICS



(TESTING ON 6 KW



Model no. P630(S)Dmx

- ➔ Digital display addressing switch
- ➔ 6 CH 24 kw DMX 512 Dimmer pack
- ➔ Power 3 phase or 220 volt 50Hz
- ➔ Each Chanel 25 Amp MCB brand Indoasian.
- ➔ Load by 16 Amp. 5 pin socket.
- ➔ Flash switch, Dmx data, error indicators
- ➔ Chesses Earthing
- ➔ Master for dimming
- ➔ Each ch16 amp.\* 2 Socket of 5 pin
- ➔ 8 pin circular socket for remote in
- ➔ Phase indicators by R Y B L.E.D
- ➔ 16 and 18 SWG IRON SEET
- ➔ Size : 485x370x165
- ➔ Weight: 16 kg.



Model no. P412 DA

- ➔ 12 CH Dmx to Analogue converter
- ➔ Input data by Male XLR of Dmx 512 panel
- ➔ Output each ch 10 volt dc.
- ➔ Use for Analog dimmer pack
- ➔ Size:485x205x60
- ➔ Weight:3.7 kg
- ➔ Error indicator by RED L.E.D
- ➔ Data indicators. By blue L.E.D
- ➔ Addressing 1 to 512 ch.
- ➔ Data reverse switch

Model no. P604(S)Dmx



(TESTING ON 4 KW  
each ch.)

20 and 18 SWG IRON SEET

- ➔ 6 CH 15 kw DMX 512 Dimmer pack
- ➔ Power 3 phase or 220 volt 50Hz
- ➔ Each Chanel 20 Amp MCB.
- ➔ Load by 16 Amp. 5 pin socket.
- ➔ Flash switch ,Dmx Data and error ind.
- ➔ Chassis Ground feature.
- ➔ Master for dimming
- ➔ Each ch16 amp. X 2 Socket of 5 pin
- ➔ 8 pin circular socket for remote in
- ➔ Phase indicators by R Y B L.E.D
- ➔ Size : 485x370x165
- ➔ Weight:10.9 kg.

Model No. P62R/F

6 channel 12 kw chaser. Main input by HT2 30Amp. strip. Output by HT8 30Amp. strip One Selector switch for chaser channel selecting. One knob for chaser speed.



Model NO. P62R/F



Model no. P104

- ➔ 1 CH 2.5 kw Dimmer
- ➔ Power 230 volt 50Hz
- ➔ Power on indicator by RED LED
- ➔ Load indicators by GREEN LED.
- ➔ Flash switch
- ➔ INPUT By Ht2 30Amp.
- ➔ Output by Ht2 30 Amp.
- ➔ Size: 180x135x45mm
- ➔ Weight : .980kg.

(Testing on 4kw)

Model No. P62A

6 channel 12 kw action chaser. Main input by HT2 30Amp. strip. Output by HT8 30Amp. strip. SIZE: (WHD) 200x45x200 WEIGHT: 2.5KG COLOR: Grey.



Model NO. P62A



(TESTING ON 6 KW  
each ch.)

- ➔ Model no. P330(ST)DDmx
- ➔ 3 CH 12 kw Dmx 512 Dimmer
- ➔ Each ch 4 kw load with Ht4 60 Amp.
- ➔ Power 230 volt 50Hz
- ➔ With Ht2 60 Amp.
- ➔ Power on indicator by RED LED
- ➔ Dmx on , Error and Load indicators with LED
- ➔ Dmx Addressing with Digital Display
- ➔ Each ch 25 amp. MCB Over

load protection.  
Size :

Weight :



Model NO. P66A

- ➔ Model no P66A
- ➔ 6 Ch 24 Action chaser
- ➔ 6 ch 36 kw Action chaser
- ➔ Main input by 60amp. HT 4
- ➔ Size 200x200x50
- ➔ Weight;- 2.250kg




Data ic ST  
485

Model no. SPL012

- ➔ Power on/off switch.
- ➔ Power input by power M socket
- ➔ Each ch output indicators
- ➔ Data input by XLR male panel mount
- ➔ Each way /ch load 15 no.
- ➔ Data output length 200 mtr. 14/36
- ➔ Size : 485X160X50 ➔ Weight: 3.9 Kg

- ➔ 12 CH dmx booster/splitter
- ➔ 220 volt 50Hz main input
- ➔ 19" Rack mount feature.

MODE No. K06

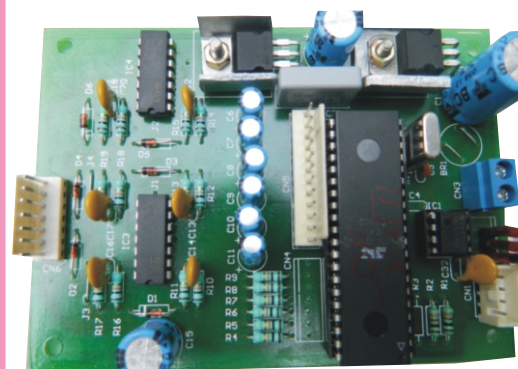

6 CH. DMX KIT

- ➔ 6 ch Dmx 512 circuit board/kit.
- ➔ Supply 15 volt 300 mili amp.
- ➔ Dmx 512 data receiving by 3 pin B/S 1g 2- 3+
- ➔ Data output ,Error and power on indicators.
- ➔ Indicators out CN1C pin1+ positive
- ➔ Pin no. 2 power, pin no. 3 data ,pin no. 4 error
- ➔ CN 6 Pin 1-,2 to 7 10 volt output.
- ➔ CN 5A Pin 1ground ,pin 2 to 12 address set.
- ➔ CN 3C 0-15 Volt 300 mili amp. Supply.
- ➔ Size : 77x106mm
- ➔ Weight: 150 g


Model no. P304(S)



- ➔ Output by 3x16Amp. 5 pin electrical socket
- ➔ Size: 300x240x85mm WLH Weight : 3.750 kg

- ➔ 3 CH 7.5 kw Dimmer
- ➔ Each ch 2.5 kw load.
- ➔ Power 230 volt 50Hz
- ➔ Power on indicator by RED LED
- ➔ Load indicators by RED LED.
- ➔ Flash switch
- ➔ INPUT By Ht2 60Amp.

MODEL No. K012

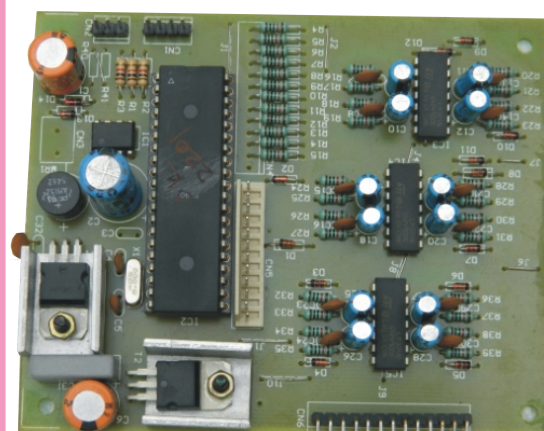


12 CH. DMX KIT

- ➔ 12 ch Dmx 512 circuit board/kit.
- ➔ Supply 15 volt 500 mili amp.
- ➔ Dmx data receiving CN 2 by 3 pin 1g 2- 3+
- ➔ Data output ,Error and power on indicators.
- ➔ Indicators out CN1C pin1+ positive
- ➔ Pin no. 2 power, pin no. 3 data ,pin no. 4 error
- ➔ CN 6 Pin 1-,2 to 13 10 volt output.
- ➔ CN 5 Pin 1-, pin 2 to 12 address set.
- ➔ CN 3 0-15 Volt 500 mili amp. Supply.
- ➔ Size : 89x110mm ➔ Weight: 200 g




**MODEL No. K024**

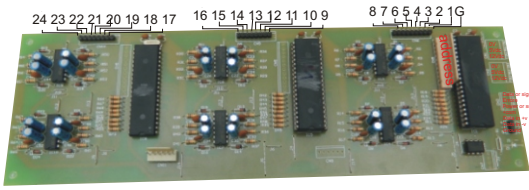

- ➔ 24 ch Dmx 512 circuit board/kit.
- ➔ Supply 15 volt 750 mili amp.
- ➔ Dmx data receiving by CN 4 pin 1g 2- 3+
- ➔ Data output and Error indicators.
- ➔ Indicators out CN3 pin1+5v pin 2 -5V
- ➔ Pin no. 3 Error, pin no. 4 data ,pin no. 5 -5v
- ➔ CN 6 Pin1-5v,2 to9 10 volt output.
- ➔ CN 9 Pin1-5v,2 to9 10 volt output.
- ➔ CN 10 Pin1-5v,2 to9 10 volt output.
- ➔ CN 5 Pin 1-5v ,pin 2 to 12 address set.
- ➔ CN 2 0-5-12 Volt 750 mili amp. Supply.
- ➔ Size : 87x280mm ➔ Weight: 250g

**MODEL No Ko48**

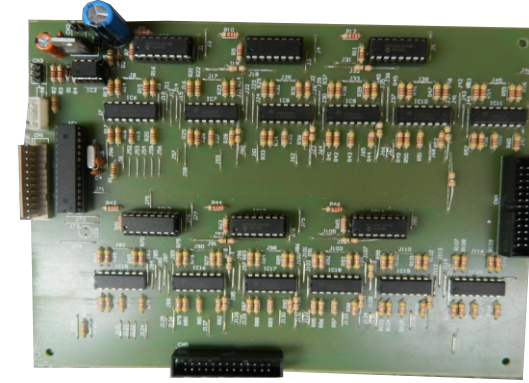

- ➔ 48 ch Dmx 512 circuit board/kit.
- ➔ Supply 15 volt 1 amp.
- ➔ Dmx data receiving CN 3 by 3 pin 1g 2- 3+
- ➔ Data output ,Error and power on indicators.
- ➔ Indicators out Cn2 pin1+ positive
- ➔ Pin no. 2 power, pin no. 3 error
- ➔ CN 4 Pin1-5v,2 to25 10 volt output.
- ➔ CN 5 Pin1-5v,2 to25 10 volt output.
- ➔ CN 6 Pin 1- ,pin 2 to 25 address set.
- ➔ CN 3 0-15 Volt 500 mili amp. Supply.
- ➔ Size : 186x146mm ➔ Weight: 300 g



**12X2 CH DMX CONSOLE**

Seen setter Stage lighting.  
-12 ch /24 ch Dmx console.  
Program design file and save.  
Operated dmx product.  
Cross fade available.



**Model no. DIGITAL24**

- ➔ 24 ch Dmx 512 panel or console
- ➔ Master A and Master B fadder.
- ➔ Chaser speed Fadder
- ➔ Audio level fadder
- ➔ Dimmer, chaser ,Audio and Blackout indicators.
- ➔ XLR F Socket. Output by M ,F both socket
- ➔ Flash switch for each ch
- ➔ Blackout feature
- ➔ Size : 485x160x50 ➔ Weight: 3.2 kg

**Data IC MAXIME 485 USE IN**



**Model no. SPL006M**

- ➔ Dmx lighting, low data recovery.
- ➔ Large quantity lighting in dmx
- ➔ One place around 100 product connectivity.
- ➔ 6CH dmx booster/splitter
- ➔ 220 volt 50Hz power input
- ➔ If any loose connection, reverse, open then error
- ➔ Power input by Male power socket
- ➔ Each ch output indicators
- ➔ Data input by Metal panel mount XLR M Socket.
- ➔ Data receiving length 200 mtr. 14/36
- ➔ Each way /ch load 15-20no.
- ➔ Size : 485X160X50 ➔ Weight: 3.350Kg

**Data ic ST 485**



**Model no. SPL012**

- ➔ 12 CH dmx booster/splitter
- ➔ 220 volt 50Hz main input
- ➔ 19" Rack mount feature.
- ➔ Power on/off switch.
- ➔ Power input by power M socket
- ➔ Each ch output indicators
- ➔ Data input by XLR male panel mount
- ➔ Each way /ch load 15 no.
- ➔ Data output length 200 mtr. 14/36
- ➔ Size : 485X160X50 ➔ Weight: 3.9 Kg

**MODEL No. P524AD**



- ➔ Error indicator by RED L.E.D
- ➔ Data in indicators By blue L.E.D
- ➔ Addressing 1 to 512 ch.
- ➔ Data reverse switch
- ➔ 24 CH Dmx to Analogue converter
- ➔ Input data by Male XLR
- ➔ For Output 25 pin D connecter and Its pallel 2x15 pin D connecter.
- ➔ Size:485x205x60
- ➔ Weight:3.9 kg

**Model no. P606(S)Dmx**



- ➔ 6 CH 24 kw DMX 512 Dimmer pack
- ➔ Power 3 phase or 220 volt 50Hz
- ➔ Each Chanel 25 Amp MCB. Indoasian.
- ➔ Load by 16 Amp. 5 pin socket.
- ➔ Flash switch, Dmx data, error indicators
- ➔ Chesses Earthing
- ➔ Master for dimming
- ➔ Size : 485x370x165 ➔ Weight: 12 kg.

(TESTING ON 6 KW each ch.)

**Model P18x20A(R)**



**DISPLAY AS RACK DIMMER OR TOURING DIMMER**

48 and more ch dimmer possible  
Each ch 2.5 and 4 kw .

**Model P36x10A(R)**



**36 Way 90 kw dimmer .**

3 Dimmer pack set of 12 ch.  
4 and more dimmer pack possible



**Model no. P12025(S)Dmx**



- ➔ 12 CH 30 kw DMX 512 Dimmer pack
- ➔ Power 3 phase or 220 volt 50Hz
- ➔ Each Chanel 20 Amp MCB.
- ➔ Load by 16 Amp. 5 pin socket.
- ➔ Flash switch, Dmx data, error indicators
- ➔ Chesses Earth.
- ➔ Master for All ch dimming.
- ➔ Each ch16 amp.of two Socket of 5 pin
- ➔ 8 pin circular socket for remote input.
- ➔ Phase indicators by R Y B L.E.D
- ➔ Size : 510x185x450 ➔ Weight: 16 kg.

(TESTING ON 4 KW  
each ch.)

**Model no. P600**



- ➔ 6 CH Dimmer mixer
- ➔ Flash switch
- ➔ Chaser ch. Selector switch
- ➔ Master for dimming
- ➔ 8 pin circular socket for output
- ➔ Size : 260x180x50mm(WLH)
- ➔ Weight: 1.6 Kg. Packing.

**Model no. P1204(SU)**



- ➔ 12 CH 48 kw DMX 512 Dimmer pack
- ➔ Power 3 phase or 230 volt 50Hz
- ➔ Each Chanel 25 Amp MCB. Indoasian.
- ➔ Load by 16 /20Amp. 3 pin socket.
- ➔ Flash switch, Dmx data, error indicators
- ➔ Chesses Earthing
- ➔ Master for dimming All ch.
- ➔ Each ch16A/20A-6h Socket of 3 pin
- ➔ 15 pin D connector for remote input.
- ➔ Phase indicators by R Y B Neon Bulb.
- ➔ Size : 510x185x450 ➔ Weight: 18 kg.

(TESTING ON 4 KW  
each ch.)

**Model no. P1200**



- ➔ 12 CH Dimmer mixer
- ➔ Switch for dimming/chaser
- ➔ Output by 15 pin D connector.
- ➔ Flash switch for each ch.

- ➔ One fade for Master and one for chase speed
- ➔ Fuse of 1Amp 2 no with main power input socket.
- ➔ Master for dimming
- ➔ 2x8 pin circular M socket for output
- ➔ Size : 400x200x75mm(WLH)
- ➔ Weight: 3.2 Kg . W/packing

**24 CHN. DMX PANNEL FOR DMX 512.**



**Model no. SPL006**

**Data ic ST 485**



- ➔ 6CH dmx booster/splitter
- ➔ 220 volt 50Hz main input
- ➔ 19" Rack mount feature.
- ➔ Power on/off switch.
- ➔ Power input by pc socket

- ➔ Each ch output indicators
- ➔ Data input by panel mount XLR Male 3 pin socket
- ➔ XLR M Socket. Output by Fmale socket
- ➔ Data output lenth 200 mtr. 14/36
- ➔ Each way /ch load 15 no.
- ➔ Size : 485x160x50 ➔ Weight: 3.2 kg
- USE For dmx to dmx extension, dmx data amplify.

